



POT / COMBI DISHWASHER

FEATURES

- Versatile pot dishwasher with a dual-pump system that operates at high pressure and flow rates to clean dishes without using granules.
- Suitable for heavy-duty dishwashing in schools, bakeries, food catering facilities, stores, etc.
- Loading dishes through the door provides a compact installation and ergonomic handling of dishes.
- Capable of accommodating bulky dishware with an opening height of 820 mm.
- Powerful dishwashing with water pressure of up to 1 bar.
- Electrically controlled water pressure allows easy adjustment for regular dishwashing.
- Offers options for varied heavy-duty dishwashing tasks.
- 4 different washing programs available.
- Low noise level relative to dishwashing power.
- Dosing pump for fine dosage of rinse aid.
- Soft start feature.
- Soaking program with reduced water pressure.
- Easy to clean with smooth interior surfaces.
- Display in tempered glass.
- Drain pump with functions such as automatic draining and water change.
- Break tank with boosting pump according to EN1717 standards.
- Energy-saving system
- Compact installation
- Status indication
- Energy-saving mode
- New spray arm - optimized for better coverage and designed for heavy-duty dishwashing.
- Customized basket inserts for different types of dishware.
- Interior lighting



OPTIONS

- ECO-FLOW heat recovery with rinse function.
- Stainless steel fittings in final rinse.
- Detergent dosing for liquid detergents.
- Lowered lift height 130 mm for adaption to limited ceiling height.

TECHNICAL DATA	WD-10S
Washing pump potwashing (kW)	2.35
Washing pump normal wash (kW)	0.75
Booster heater (kW)	12
Tank heater (kW)	9
Booster pump (kW)	0.58
Drain pump (kW)	0.1
ECO-FLOW heat recovery (W)*	52
Tank volume (liter)	90
Weight, machine in operation (kg)	370
Enclosure class (IP)	44

* Option

CAPACITY AND OPERATING DATA	WD-10S
Total washing time P1 (min) *	2.0
Total washing time P2 (min) *	3.7
Total washing time P3 (min) *	6.0
Soaking program (min)*	15
Basket size (mm)	815x670
Max. capacity, baskets/hour (no.)****	30
Water consumption rinsing/programme (liter) **	4
Noise level (dB(A))*** Normal/Heavily	53/56

* Factory setting. The washing time can be adjusted.

** The water consumption depends on local conditions. Fine adjustments can be made during installation.

*** SS-EN ISO 9614-2 The A-weighted sound pressure level LpA in a free field 1 meter from the machine.

**** If colder water than 50°C, the capacity is reduced.

CONNECTION, MACHINE	WD-10S
Total connected power (kW)	14.4
Main fuse 400-415V 3N~ (A)*	25
Max. connection area 400-415V 3N~ (L1-L3,N,PE) Cu (mm2)**	4

* Other voltage on request.


** Cable 3 m is included.

Wexiödisk

WATER, DRAIN AND VENTILATION CONNECTIONS	WD-10S
Water quality, hardness (°dH)	2 - 7
Warm water connection 50-65°C (external thread)	G¾
Drain connection, PP pipe (ø mm.)	22
Water capacity, pressure (kPa)	100-600
Water capacity, flow (litres/min)	5
Floor drain, capacity (litres/sec)	3
Heat load to the room (total, sensible, latent) (kW)	3.9 / 2.9 / 1.0
For machines with the option ECO-FLOW: heat load to the room (total, sensible, latent) (kW)	2.7 / 2.0 / 0.7

SIZE AND WEIGHT FOR TRANSPORTATION	WD-10S
Size, LxWxH (mm.)*	1035x1035x2005
Weight (kg)*	277

* Packaging included

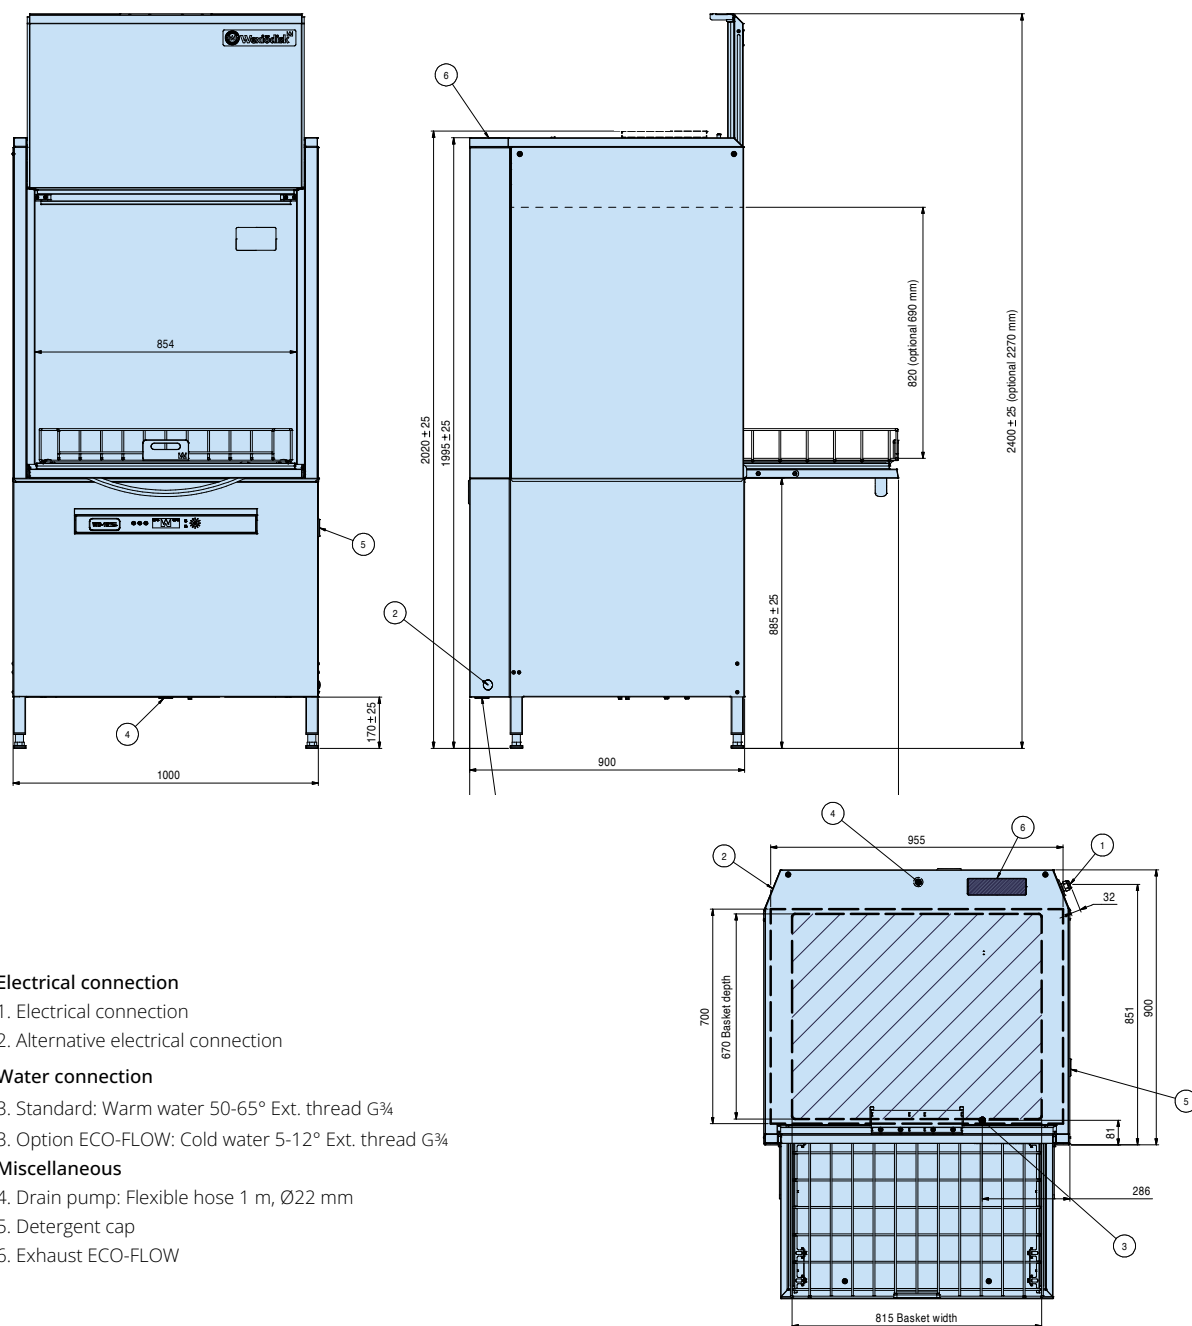

Electrical connection

1. Electrical connection
2. Alternative electrical connection

Water connection

3. Standard: Warm water 50-65° Ext. thread G¾
3. Option ECO-FLOW: Cold water 5-12° Ext. thread G¾

Miscellaneous

4. Drain pump: Flexible hose 1 m, Ø22 mm
5. Detergent cap
6. Exhaust ECO-FLOW

We reserve the right to change technical data.

Wexiödisk

TELEPHONE: +46 470 77 12 00 ADDRESS: Mårdvägen 4 SE-352 45 Växjö SWEDEN
E-MAIL: wexiodisk@wexiodisk.com WEBB: www.wexiodisk.com